




DLC SMART FILM TECHNICAL PARAMETERS

1:08 Contrast / Adhesive Type (20 μm)

ELECTRICAL	TECHNICAL	OPTICAL
Working Voltage (ON): 60-65VAC	Switching State ON - Transparent	Visible Light Transmission (ON): 36%
Power Consumption <0.5W/SF	Switching State OFF - Opaque	Visible Light Transmission (OFF): 4.5%
Operating temperature: -20~60°C	Functional Thickness: 482 μm	Haze (ON): 2.4%
Responding Time (OFF-ON):<5ms	Max Size 57 inch x 165 inch	Haze (OFF): 97%
Responding Time (ON-OFF) <150ms	Lifespan (ON): > 600000	View Angle (ON): 160°

PRODUCT STRUCTURE

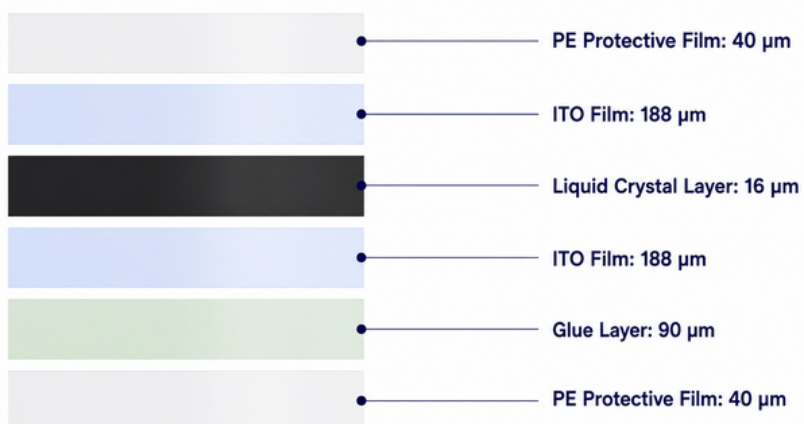



DLC SMART FILM TECHNICAL PARAMETERS

1:15 Contrast / Adhesive Type (20 μm)

ELECTRICAL	TECHNICAL	OPTICAL
Working Voltage (ON): 60-65VAC	Switching State ON - Transparent	Visible Light Transmission (ON): 28%
Power Consumption <0.5W/SF	Switching State OFF - Opaque	Visible Light Transmission (OFF): 1.5%
Operating temperature: -20~60°C	Functional Thickness: 482 μm	Haze (ON): 3%
Responding Time (OFF-ON):<5ms	Max Size 57 inch x 165 inch	Haze (OFF): 97%
Responding Time (ON-OFF) <150ms	Lifespan (ON): > 600000	View Angle (ON): 160°

PRODUCT STRUCTURE

